

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
8 February 2001 (08.02.2001)

PCT

(10) International Publication Number
WO 01/09655 A1

- (51) International Patent Classification⁷: **G02B 6/27**
- (21) International Application Number: **PCT/US00/19903**
- (22) International Filing Date: **20 July 2000 (20.07.2000)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:
09/365,680 **2 August 1999 (02.08.1999)** **US**
- (71) Applicant: **NEW FOCUS, INC.** [US/US]; 2630 Walsh Avenue, Santa Clara, CA 95051-0905 (US).
- (72) Inventors: **HUANG, Yonglin**; 2463 Flickinger Road, San Jose, CA 95131 (US). **PING, Xie**; 1272 Chessington Drive, San Jose, CA 95131 (US).
- (74) Agent: **D'ALESSANDRO, Kenneth**; Sierra Patent Group, Ltd., P.O. Box 6149, Stateline, NV 89449 (US).
- (81) Designated States (*national*): AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published:
— *With international search report.*
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: **OPTICAL POLARIZATION BEAM COMBINER/SPLITTER**

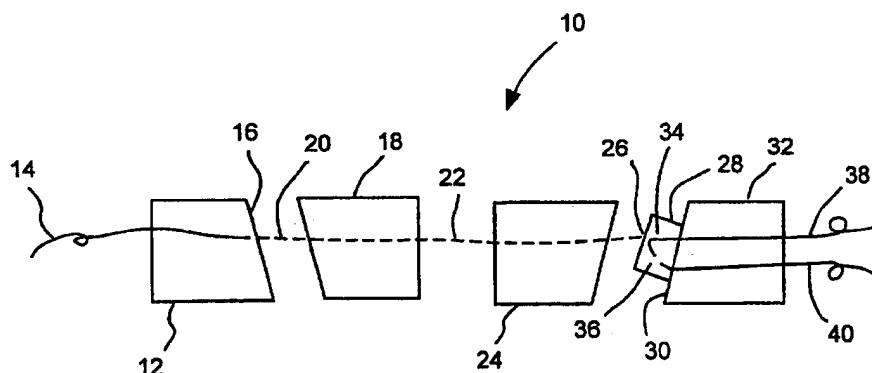

WO 01/09655 A1

(57) Abstract: An optical polarization beam splitter comprises a first optical fiber having an end defining a first optical axis, a second optical fiber having an end defining a second optical axis, and a third optical fiber having an end defining a third optical axis parallel to and spaced apart from the second optical axis. A collimating lens is disposed along the first optical axis positioned to form a collimated optical beam from the first optical fiber. A focussing lens is disposed along a path of the collimated optical beam. A birefringent walk-off crystal has a first face adjacent to the focussing lens and a second face located at a focal plane of the focussing lens and in contact with the ends of the second and third optical fibers. The birefringent crystal is oriented such that and has a thickness between its first and second faces selected such that a first component of the optical beam having a first polarization exits the crystal at its second face and enters the end of the second optical fiber along the second optical axis and a second component of the optical beam having a second polarization orthogonal to the polarization of the first polarization exits the crystal at its second face and enters the end of the third optical fiber along the third optical axis.

SPECIFICATION

OPTICAL POLARIZATION BEAM COMBINER/SPLITTER

1. Field of the Invention

5

2. The Prior Art

Optical polarization beam splitter/combiners are known in the art. These devices may be used in optical communication in many ways including, but not limited to, optical power multipliers for combining two optical pump beams to increase optical pumping power, in coherent optical communications applications, and as optical polarization division multiplexers.

10

Two examples of prior art optical polarization beam splitter/combiners are shown in FIGS. 1A and 1B and FIGS. 2A and 2B, respectively. In the optical polarization beam splitter of FIG. 1A, an input beam enters from the fiber located at the left side of the figure.

15

For the beam splitting operation, the incoming beam from fiber 1 at the left is collimated by the lens 1, and then enters the optical polarization beam splitter cube. The optical polarization beam splitter cube is able to split an arbitrary polarized light into two separated beams with orthogonally polarized directions. A first beam exits to the right and is coupled to fiber 2 through lens 2. A second beam exits in an upward direction and is coupled to fiber 3 through lens 3. In this way, an optical polarization beam splitter is realized. These three fibers could each be a single mode fiber, a polarization maintaining (PM) fiber, or even a multi-mode fiber.

20

The prior-art device depicted in FIG. 1A may be used as a bi-directional device if fiber 2 and fiber 3 are PM fibers, such that the optical beam polarization states coming from these two fibers are well defined and orthogonal to each other. Then these two beams can be added together at fiber 1 as shown in FIG. 1B. In this way, an optical polarization beam combiner is realized.

25

The device depicted in FIGS. 1A and 1B functions for its intended purpose. It however, suffers from several disadvantages, such as a larger device size necessitated by the need to employ an orthogonally disposed beam, suffer from a low extinction ratio, difficult to manage the fibers.

30

A second prior-art embodiment of an optical polarization beam combiner/splitter is depicted in FIGS. 2A and 2B. The optical principles of operation of the embodiment of FIGS. 2A and 2B are almost the same as those of FIGS. 1A and 1B.

Referring to FIG. 2A, a birefringent crystal is used to split the incoming arbitrary polarization light focussed from fiber 1 by lens 1 into two parallel beams having orthogonal polarization directions. These two beams are focused into fiber 2 and fiber 3, respectively, by lenses 2 and 3, such that the optical polarization beam splitter is realized. As shown in
5 FIG. 2B, an optical polarization beam combiner can be realized as well. Compared to the embodiments of FIGS. 1A and 1B, the approach of FIGS. 2A and 2B provides high extinction ratio, employs fewer optical parts, and could be manufactured without the use of an optical epoxy in the optical path.

10 The device depicted in FIGS. 2A and 2B has its own drawbacks. Since fiber 2 and fiber 3 are located at the same side of the device, the birefringent crystal must have a length sufficient separate the two beams enough to accommodate the required spacing between lenses 2 and 3. Typically, lenses for this application have diameters of around 1.8mm, requiring the minimum spacing between lens axes to also be about 1.8mm. A birefringent
15 must have a length of about 18mm to provide the required beam separation of at least about 1.8mm to accommodate the placement of lenses 2 and 3.

BRIEF DESCRIPTION OF THE INVENTION

An optical polarization beam splitter according to one embodiment of the present invention comprises a first optical fiber having an end defining a first optical axis, a second
20 optical fiber having an end defining a second optical axis, and a third optical fiber having an end defining a third optical axis parallel to and spaced apart from the second optical axis. A collimating lens is disposed along the first optical axis positioned to form a collimated optical beam from the first optical fiber. A focussing lens is disposed along a path of the collimated optical beam. A birefringent walk-off crystal has a first face adjacent to the focussing lens
25 and a second face located at a focal plane of the focussing lens and in contact with the ends of the second and third optical fibers. The birefringent crystal is oriented such that and has a thickness between its first and second faces selected such that a first component of the optical beam having a first polarization exits the crystal at its second face and enters the end of the second optical fiber along the second optical axis and a second component of the optical
30 beam having a second polarization orthogonal to the polarization of the first polarization exits the crystal at its second face and enters the end of the third optical fiber along the third optical axis.

An optical polarization beam splitter according to another embodiment of the present invention comprises a first optical fiber having an end defining a first optical axis, a second

optical fiber having an end defining a second optical axis, and a third optical fiber having an end defining a third optical axis parallel to and spaced apart from the second optical axis. A collimating lens is disposed along the first optical axis and is positioned to form a collimated optical beam from the first optical fiber. A birefringent walk-off crystal is disposed in a path of the collimated optical beam. The crystal is oriented such that and has a thickness between first and second faces thereof selected such that a first component of the optical beam having a first polarization transits the crystal along a first path and a second component of the optical beam having a second polarization orthogonal to that of the first polarization transits the crystal along a second path disposed at a walkoff angle with respect to the first path. The first and second paths exit the second face of the crystal as substantially parallel first and second paths. A Wollaston prism (a pair of wedges) is disposed along the substantially parallel first and second paths and oriented such as to bend the substantially parallel first and second paths towards each other to form converging first and second paths. A focussing lens is disposed along the converging first and second paths and positioned such that a first component optical beam travelling along the first converging path is directed into the end of the second optical fiber along the second optical axis and a second component optical beam travelling along the second converging path is directed into the end of the third optical fiber along the third optical axis.

An optical polarization beam splitter according to another embodiment of the present invention comprises a first optical fiber having an end defining a first optical axis, a second optical fiber having an end defining a second optical axis, and a third optical fiber having an end defining a third optical axis parallel to and spaced apart from the second optical axis. A collimating lens is disposed along the first optical axis and is positioned to form a collimated optical beam from the first optical fiber. A first Wollaston prism is disposed in a path of the collimated optical beam and oriented such that a first component of the optical beam having a first polarization transits the prism along a first path disposed at a first angle with respect to the first optical axis and a second component of the optical beam having a second polarization orthogonal to that of the first polarization transits the prism along a second path disposed at a second angle with respect to the first optical axis, the first and second angles being substantially symmetrical about the first optical axis. A second Wollaston prism is disposed along the first and second paths and oriented such as to bend the first and second paths towards each other to form converging first and second paths. A focussing lens is disposed along the converging first and second paths and positioned such that a first

component optical beam travelling along the first converging path is directed into the end of the second optical fiber along the second optical axis and a second component optical beam travelling along the second converging path is directed into the end of the third optical fiber along the third optical axis.

- 5 An optical polarization beam splitter according to another embodiment of the present invention comprises a first optical fiber having an end defining a first optical axis, a second optical fiber having an end defining a second optical axis, and a third optical fiber having an end defining a third optical axis parallel to and spaced apart from the second optical axis. The second and third optical axes are symmetrical about the first optical axis. A first
- 10 focussing lens is disposed along the first optical axis. A Wollaston prism is disposed at a location along the first optical axis where a focal point of the first focussing lens lies on an interface between two component pieces of the prism wedge such that a first component of an optical beam from the first optical fiber having a first polarization is directed along a first path disposed at a first angle with respect to the first optical axis and a second component of
- 15 the optical beam having a second polarization orthogonal to that of the first polarization is directed along a second path disposed at a second angle with respect to the first optical axis, the first and second angles being substantially symmetrical about the first optical axis. A second focussing lens is disposed along the first and second paths at a location selected to focus a first component optical beam into the end of the second optical fiber to focus a
- 20 second component optical beam into the end of the third optical fiber.

BRIEF DESCRIPTION OF THE DRAWING FIGURES

FIGS. 1A and 1B are optical block diagrams of a first typical prior-art device useful as both a beam combiner and beam splitter.

- FIGS. 2A and 2B are optical block diagrams of a second typical prior-art device useful as both a beam combiner and beam splitter.
- 25

FIG. 3 is an optical block diagram of an optical polarization beam combiner/splitter in accordance with a first embodiment of the invention.

FIG. 4 is an optical block diagram of an optical polarization beam combiner/splitter in accordance with a second embodiment of the invention.

- FIG. 5 is an optical block diagram of an optical polarization beam combiner/splitter in accordance with a third embodiment of the invention.
- 30

FIG. 6 is an optical block diagram of an optical polarization beam combiner/splitter in accordance with a fourth embodiment of the invention.

DETAILED DESCRIPTION OF A PREFERRED EMBODIMENT

Persons of ordinary skill in the art will realize that the following description of the present invention is illustrative only and not in any way limiting. Other embodiments of the invention will readily suggest themselves to such skilled persons having the benefit of this disclosure.

Referring now to FIG. 3, an optical block diagram of an embodiment of an optical polarized beam combiner/splitter 10 according to the present invention is shown. A first fiber ferrule 12 terminates fiber 14 at an angled face 16 thereof. Angled face 16 may be polished to an angle of about 8° to 10° as is the end of fiber 14, as is known in the art to avoid deleterious effects from internal reflections in the optical fiber. Fiber 14 carries a combined optical beam having a first component polarized in a first direction and a second optical beam polarized in a second direction orthogonal to the first direction. Fiber ferrule 12 may have a length in the optical path direction of about 4 mm.

A first lens 18 may be spaced apart from fiber ferrule 12 by about 1mm, may have a length in the optical path direction of about 3 mm and collimates the combined beam 20 emerging from the end of fiber 14 to produce a collimated combined beam 22. A second lens 24 may be spaced apart from first lens 18 by a distance of about 2mm, may have a length in the optical path direction of about 3 mm and focuses the collimated combined beam 22 at a focal point 26 on a first face of birefringent walkoff crystal 28. As presently preferred, both lens 18 and lens 24 may be graduated-index-of-refraction (GRIN) lenses, although conventional lenses may also be employed. Persons of ordinary skill in the art will appreciate that two separate lenses 18 and 24 are employed to perform the collimating and focussing functions to minimize the introduction of spherical aberrations.

Birefringent walkoff crystal 28 is disposed at an angled face 30 of a ferrule 32. A first component beam 34 from fiber 14 passes through birefringent walk-off crystal 28 without refraction and a second component beam 36 passes through birefringent walk-off crystal 28 after being refracted at an downward angle. The thickness of birefringent walk-off crystal 28 is selected so that the paths of beams 34 and 36 walk off from one another by a distance selected to match the spacing between optical fibers 38 and 40 held in ferrule 32.

Birefringent walk-off crystal 28 may be comprised of a material such as YVO_4 , LiNbO_3 , etc. Typical thicknesses for birefringent walk-off crystal 28 are in the range of from about 1mm to about 2mm and the distance between second lens 24 and ferrule 32 may be between about 1mm to 2mm. As those of ordinary skill in the art will appreciate, changing the incident angle of the birefringent walk-off crystal 28 will change the walk-off distance.

From an examination of FIG. 3 persons of ordinary skill in the art will appreciate that an improved optical polarizing beam combiner/splitter has been described. Because the optical paths in optical polarizing beam combiner/splitter 10 are all substantially parallel to a single optical axis, it can be packaged in a small, compact coaxial package, thus allowing for a smaller footprint and providing an improved ease in fiber management. Furthermore, the combination of optical components utilized in the embodiment of FIG. 3 permits close spacing of the two parallel-axis component beams and avoids the use of longer walk-off distances that would otherwise be required to provide sufficient beam spacing to accommodate the physical sizes of the optical components. For example, by using the optical components of the present invention, the two parallel axis component beams may be spaced apart by as little as 0.125mm (125 microns). In addition, the entire length of the splitter/combiner in the illustrative embodiment of FIG. 3 is less than about 18mm to about 20mm.

Persons of ordinary skill in the art will appreciate that the device of FIG. 3 has been described by following the optical path from left to right across the figure and performs the function of a beam splitter. Such skilled persons will appreciate that two oppositely polarized optical beams emerging from fibers 38 and 40 on the right and travelling in the direction from right to left across the drawing figure will be combined and directed into fiber 14 at the left of FIG. 3 in accordance with the principles of the present invention, so long as optical fibers 38 and 40 are PM fibers.

Referring now to FIG. 4, an optical block diagram of another embodiment of an optical polarized beam combiner/splitter 40 according to the present invention is shown.

The embodiment of FIG. 4 has been described for an orientation wherein a coincident beam having two components enters from optical fiber 42 at the left of the figure and is split into two component beams which emerge at the right side of the figure, but persons of ordinary skill in the art will appreciate that the analysis of two component beams entering the combiner/splitter from the right and being combined and directed into optical fiber 42 according to the present invention follows from the same optical principles described as responsible for beam splitting, so long as the optical fibers delivering the two component beams are polarization maintaining fibers.

Optical fiber 42 is disposed in ferrule 44 as is known in the art and is end polished at an angle as is known in the art. Diverging composite optical beam 46 from the end of optical fiber 42 is collimated by collimating lens 48 and collimated composite optical beam 50 enters birefringent walkoff crystal 52. A first optical beam component transits crystal 52 on beam

path 54 and a second optical beam component transits crystal 52 on beam path 56 at a walkoff angle with respect to beam path 54. The length of birefringent crystal 52 is selected to provide a selected walkoff distance indicated by double-headed arrow 58 between the two component optical beams. In the illustrative embodiment of FIG. 4, the ferrule 44 may have
5 a length of about 4mm, the collimating lens 48 may be spaced from ferrule 44 by about 0.1mm, and may have a length in the optical path direction of about 5mm. The birefringent crystal 52 may have a length of about 10mm, and may be spaced from collimating lens 48 by about 0.2mm.

A Wollaston prism 60 is disposed in the paths of optical beams 54 and 56 to bend the
10 propagation directions of optical beams 54 and 56 so that they may be focussed by lens 62 such that they enter optical fibers 64 and 66, respectively, disposed in ferrule 68. As presently preferred, lens 62 comprises a GRIN lens, although a conventional lens may also be employed. In the illustrative embodiment of FIG. 4, the Wollaston prism 60 may have a length of about 4mm, and may be spaced from birefringent crystal 52 by about 0.2mm. Lens
15 62 may have a length of about 5mm, and may be spaced from Wollaston prism 60 by about 0.2mm. Ferrule 68 may have a length of about 4mm, and may be spaced from lens 62 by about 0.1mm. The entire length of the splitter/combiner in the illustrative embodiment of FIG. 4 is less than about 30mm to about 40mm.

Referring now to FIG. 5, an optical block diagram of another embodiment of an
20 optical polarized beam combiner/splitter 70 according to the present invention is shown.

As with the other embodiments disclosed herein, the embodiment of FIG. 5 has been described for an orientation wherein a coincident beam having two components enters from optical fiber 72 at the left of the figure and is split into two component beams which emerge at the right side of the figure, but persons of ordinary skill in the art will appreciate that the
25 analysis of two component beams entering the combiner/splitter from the right and being combined and directed into optical fiber 72 according to the present invention follows from the same optical principles described as responsible for beam splitting, so long as the optical fibers delivering the two component beams are polarization maintaining fibers.

Optical fiber 72 is disposed in ferrule 74 as is known in the art and is end polished at
30 an angle as is known in the art. Diverging composite optical beam 76 from the end of optical fiber 72 is collimated by collimating lens 78. Ferrule 74 may have a length of about 4mm, and may be spaced from collimating lens 78 by about 0.1mm. Collimated composite optical beam 80 enters first Wollaston prism 82. A first optical beam component transits prism 82 on beam path 84 and a second optical beam component transits crystal 82 on beam path 86.

Beam paths 84 and 86 are substantially symmetrical about the optical axis of the first beam path 76 out of first fiber 72. First Wollaston prism 82 may have a length of about 2mm, and may be spaced from collimating lens 78 by about 0.3mm.

5 A second Wollaston prism 88 is disposed in the paths of optical beams 84 and 86 to bend the propagation directions of optical beams 84 and 86 towards each other so that they may be focussed by lens 90 such that they enter optical fibers 92 and 94, respectively, disposed in ferrule 96. As presently preferred, lens 90 comprises a GRIN lens, although a conventional lens may also be employed. Second Wollaston prism 88 may have a length of about 2mm, and may be spaced from first Wollaston prism 82 by about 4mm. Lens 90 may
10 have a length of about 5mm, and may be spaced from second Wollaston prism 88 by about 0.3mm. Ferrule 96 may have a length of about 4mm, and may be spaced from lens 90 by about 0.1mm.

Referring now to FIG. 6, an optical block diagram of another embodiment of an optical polarized beam combiner/splitter 100 according to the present invention is shown.

15 As with the other embodiments disclosed herein, the embodiment of FIG. 6 has been described for an orientation wherein a coincident beam having two components enters from optical fiber 102 at the left of the figure and is split into two component beams which emerge at the right side of the figure, but persons of ordinary skill in the art will appreciate that the analysis of two component beams entering the combiner/splitter from the right and being
20 combined and directed into optical fiber 102 according to the present invention follows from the same optical principles described as responsible for beam splitting, so long as the optical fibers delivering the two component beams are polarization maintaining fibers.

Optical fiber 102 is disposed in ferrule 104 as is known in the art and is end polished at an angle as is known in the art. Diverging composite optical beam 106 from the end of
25 optical fiber 102 is focussed by lens 108 into Wollaston prism 110, disposed along the optical axis 112 of optical beam 106. Ferrule 104 may have a length of about 4mm, and may be spaced from lens 108 by about 2mm. Lens 108 may be spaced from Wollaston prism 110 by about 2mm.

Wollaston prism 110 separates the composite optical beam 106 into component beams
30 114 and 116, which leave the Wollaston prism 110 at two different angles symmetrical about optical axis 112. Lens 118 focuses component optical beams 114 and 116 such that they enter optical fibers 120 and 122, respectively, disposed symmetrically about optical axis 112 in ferrule 124. As presently preferred, lenses 108 and 118 comprise conventional lenses. Wollaston prism 110 may have a length of about 4mm, and may be spaced from lens 118 by

about 2mm. Lens 118 may be spaced from ferrule 124 by about 2mm. Ferrule 124 may have a length of about 4mm.

In the embodiment of FIG. 6, light coming out of the first fiber 102 is not collimated, but instead the two lenses are used as an imaging system to focus the light into Wollaston prism 110. One advantage of this embodiment is that only one Wollaston prism 110 is employed. This embodiment, however, requires the imaging lens to be aberration free, which is difficult to achieve for most common lenses.

As will be appreciated by persons of ordinary skill in the art having the benefit of this disclosure, the present invention provides advantages over prior art splitter/combiners. First, the embodiments of the present invention employ fewer optical parts compared to the prior art arrangements. In addition, the splitter/combiners of the present invention provide improved optical performance including benefits such as lower insertion loss and possibly higher optical polarization extinction ratio by using higher extinction ratio parts. Importantly, the present invention allows manufacture of splitter combiners having much smaller footprints than those of the prior art and permits use of compact coaxial packaging to permit easier fiber management. Because the optical path is epoxy free, higher optical power handling capability is enabled.

Persons of ordinary skill in the art will appreciate that, in embodiments where the optical axis of the input and output fibers are disposed at angles other than 0° and 90° , modified Wollaston prisms fabricated with their optical axes aligned with the optical axes of the input and output fibers will be employed. For example, in an embodiment where the two orthogonal optical axes are disposed at 45° and 135° , the Wollaston prism will have an optical axis disposed at an angle of 45° . This also applies to the walkoff crystals in the other embodiments.

Such skilled persons will also appreciate that the disclosed embodiments of the optical polarized beam combiner/splitter according to the present invention are more compact than those of the prior art. For example, the optical path length of the embodiment of FIG. 3 may be about 18mm. The combined length of the elements in the optical path of the embodiment of FIG. 3 is less than about 32mm. The entire packaged optical polarized beam combiner/splitter according to FIG. 3 of the present invention can fit in a package approximately 20mm long having a diameter of about 5.5mm.

The optical path length of the embodiment of FIG. 4 may be about 33mm. The combined length of the elements in the optical path of the embodiment of FIG. 4 is less than about 32mm. The entire packaged optical polarized beam combiner/splitter according to

FIG. 4 of the present invention can fit in a package approximately 36mm long having a diameter of about 5.5mm.

5 The optical path length of the embodiment of FIG. 5 may be about 27mm. The combined length of the elements in the optical path of the embodiment of FIG. 5 is less than about 26mm. The entire packaged optical polarized beam combiner/splitter according to FIG. 5 of the present invention can fit in a package approximately 4mm by 30mm having a diameter of about 5.5mm.

10 The optical path length of the embodiment of FIG. 6 may be about 28mm. The combined length of the elements in the optical path of the embodiment of FIG. 6 is less than 20mm. The entire packaged optical polarized beam combiner/splitter according to FIG. 6 of the present invention can fit in a package approximately 30mm long having a diameter of about 5.5mm.

15 While embodiments and applications of this invention have been shown and described, it would be apparent to those skilled in the art having the benefit of this disclosure that many more modifications than mentioned above are possible without departing from the inventive concepts herein. The invention, therefore, is not to be restricted except in the spirit of the appended claims.

What is claimed is:

1. An optical polarization beam splitter comprising:
splitter/combiner optical elements aligned along a substantially straight-line optical path;
5 a first input/output fiber terminating in a first ferrule aligned along a first end of said optical path;
second and third input/output fibers terminating in a second ferrule aligned along a second end of said optical path.
2. An optical polarization beam splitter comprising:
10 a first optical fiber having an end defining a first optical axis;
a second optical fiber having an end defining a second optical axis;
a third optical fiber having an end defining a third optical axis parallel to and spaced apart from said second optical axis;
a collimating lens disposed along said first optical axis positioned to form a
15 collimated optical beam from said first optical fiber;
a focussing lens disposed along a path of said collimated optical beam;
a birefringent walk-off crystal having a first face adjacent to said focussing lens and a second face located at a focal plane of said focussing lens and in contact with said
ends of said second and third optical fibers, said crystal oriented such that and having a
20 thickness between said first and second faces selected such that a first component of said optical beam having a first polarization exiting said crystal at said second face enters said end of said second optical fiber along said second optical axis and a second component of said optical beam having a second polarization orthogonal to the polarization of said first polarization exiting said crystal at said second face enters said end of said third optical fiber
25 along said third optical axis.
3. The optical polarization beam splitter of claim 2 wherein said second and third optical fibers are polarization maintaining fibers.
4. The optical polarization beam splitter of claim 2 wherein said second optical axis and said third optical axis are spaced apart by a distance of less than 2mm.
- 30 5. The optical polarization beam splitter of claim 2 disposed in a package having a length of less than about 50mm and a diameter of less than about 10mm.
6. The optical polarization beam splitter of claim 2 disposed in a package having a length of no more than about 20mm and a diameter of no more than about 5.5mm.
7. An optical polarizing beam splitter comprising:

a first optical fiber having an end defining a first optical axis;
a second optical fiber having an end defining a second optical axis;
a third optical fiber having an end defining a third optical axis parallel to and spaced apart from said second optical axis;

5 a collimating lens disposed along said first optical axis positioned to form a collimated optical beam from said first optical fiber;

a birefringent walk-off crystal disposed in a path of said collimated optical beam, said crystal oriented such that and having a thickness between first and second faces thereof selected such that a first component of said optical beam having a first polarization
10 transits said crystal along a first path and a second component of said optical beam having a second polarization orthogonal to that of said first polarization transits said crystal along a second path disposed at a walkoff angle with respect to said first path and said first and second paths exit said second face of said crystal as substantially parallel first and second paths;

15 a Wollaston prism disposed along said substantially parallel first and second paths and oriented such as to bend said substantially parallel first and second paths towards each other to form converging first and second paths;

a focussing lens disposed along said converging first and second paths and positioned such that a first component optical beam travelling along said first converging
20 path is directed into said end of said second optical fiber along said second optical axis and a second component optical beam travelling along said second converging path is directed into said end of said third optical fiber along said third optical axis.

8. The optical polarization beam splitter of claim 7 wherein said second and third optical fibers are polarization maintaining fibers.

25 9. The optical polarization beam splitter of claim 7 wherein said second optical axis and said third optical axis are spaced apart by a distance of less than 2mm.

10. The optical polarization beam splitter of claim 7 disposed in a package having a length of less than about 50mm and a diameter of less than about 10mm.

30 11. The optical polarization beam splitter of claim 7 disposed in a package having a length of about 36mm and a diameter of about 5.5mm.

12. An optical polarizing beam splitter comprising:

a first optical fiber having an end defining a first optical axis;
a second optical fiber having an end defining a second optical axis;

a third optical fiber having an end defining a third optical axis parallel to and spaced apart from said second optical axis;

a collimating lens disposed along said first optical axis positioned to form a collimated optical beam from said first optical fiber;

5 a first Wollaston prism disposed in a path of said collimated optical beam and oriented such that a first component of said optical beam having a first polarization transits said prism along a first path disposed at a first angle with respect to said first optical axis and a second component of said optical beam having a second polarization orthogonal to that of said first polarization transits said prism along a second path disposed at a second angle with
10 respect to said first optical axis, said first and second angles being substantially symmetrical about said first optical axis;

a second Wollaston prism disposed along said first and second paths and oriented such as to bend said first and second paths towards each other to form converging first and second paths;

15 a focussing lens disposed along said converging first and second paths and positioned such that a first component optical beam travelling along said first converging path is directed into said end of said second optical fiber along said second optical axis and a second component optical beam travelling along said second converging path is directed into said end of said third optical fiber along said third optical axis.

20 13. The optical polarization beam splitter of claim 12 wherein said second and third optical fibers are polarization maintaining fibers.

14. The optical polarization beam splitter of claim 12 wherein said second optical axis and said third optical axis are spaced apart by a distance of less than about 125 microns.

25 15. The optical polarization beam splitter of claim 12 disposed in a package having a length of less than about 50mm and a diameter of less than about 10mm.

16. The optical polarization beam splitter of claim 12 disposed in a package having a length of no larger than about 30mm and a diameter of no larger than about 5.5mm.

17. An optical polarizing beam splitter comprising:

30 a first optical fiber having an end defining a first optical axis;
a second optical fiber having an end defining a second optical axis;
a third optical fiber having an end defining a third optical axis parallel to and spaced apart from said second optical axis, said second and third optical axes being symmetrical about said first optical axis;

a first focussing lens disposed along said first optical axis;

a Wollaston prism disposed at a location along said first optical axis where a focal point of said first focussing lens lies on an interface between two component pieces of said prism such that a first component of an optical beam from said first optical fiber having a first polarization is directed along a first path disposed at a first angle with respect to said first optical axis and a second component of said optical beam having a second polarization orthogonal to that of said first polarization is directed along a second path disposed at a second angle with respect to said first optical axis, said first and second angles being substantially symmetrical about said first optical axis;

a second focussing lens disposed along said first and second paths at a location selected to focus a first component optical beam into said end of said second optical fiber to focus a second component optical beam into said end of said third optical fiber.

18. The optical polarization beam splitter of claim 17 wherein said second and third optical fibers are polarization maintaining fibers.

19. The optical polarization beam splitter of claim 17 wherein said second optical axis and said third optical axis are spaced apart by a distance of less than 2mm.

20. The optical polarization beam splitter of claim 17 disposed in a package having a length of less than about 50mm and a diameter of less than about 10mm.

21. The optical polarization beam splitter of claim 17 disposed in a package having a length of no larger than about 30mm and a diameter of no larger than about 5.5mm.

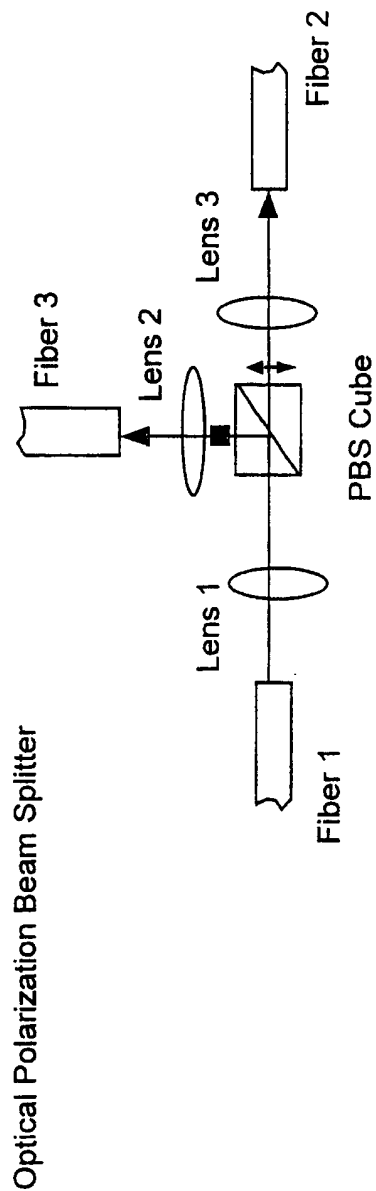


Fig. 1A

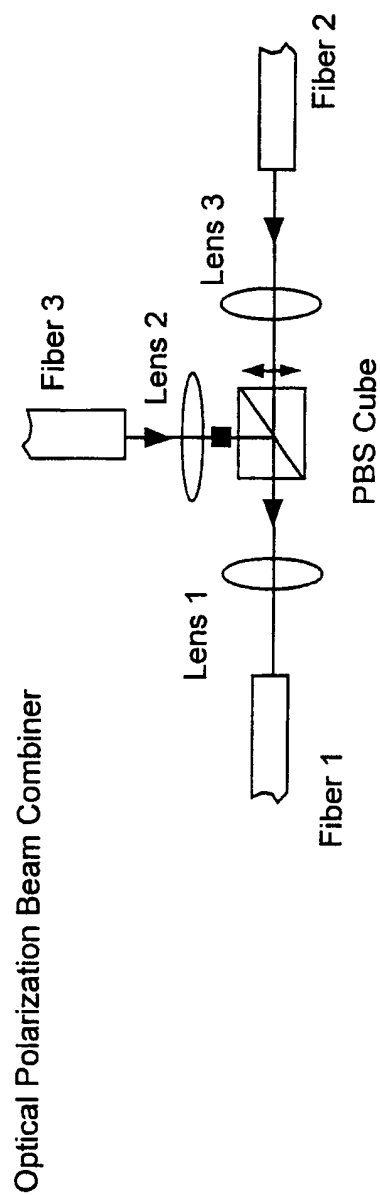


Fig. 1B

Optical Polarization Beam Splitter

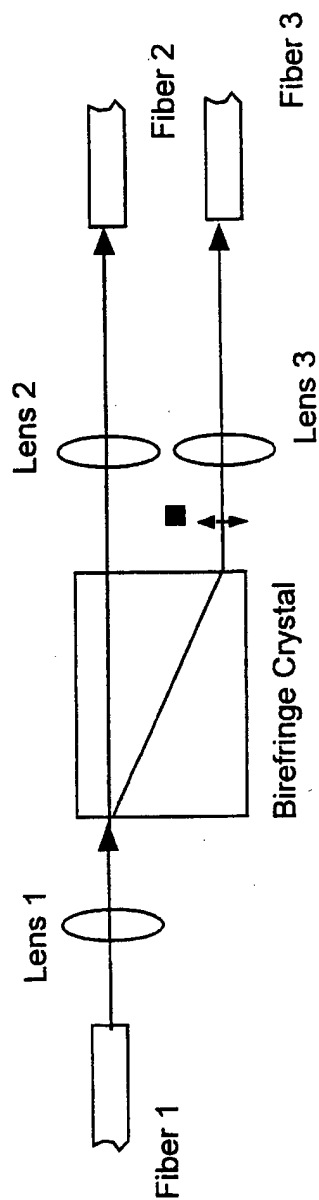


Fig. 2A

Optical Polarization Beam Combiner

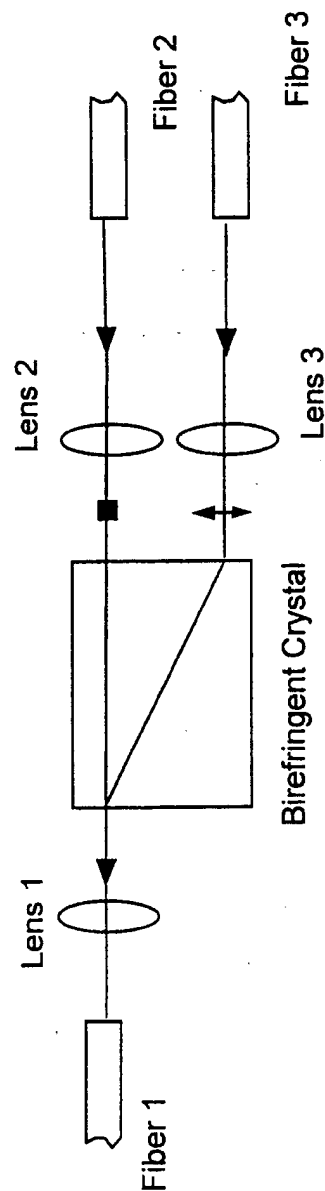


Fig. 2B

3/6

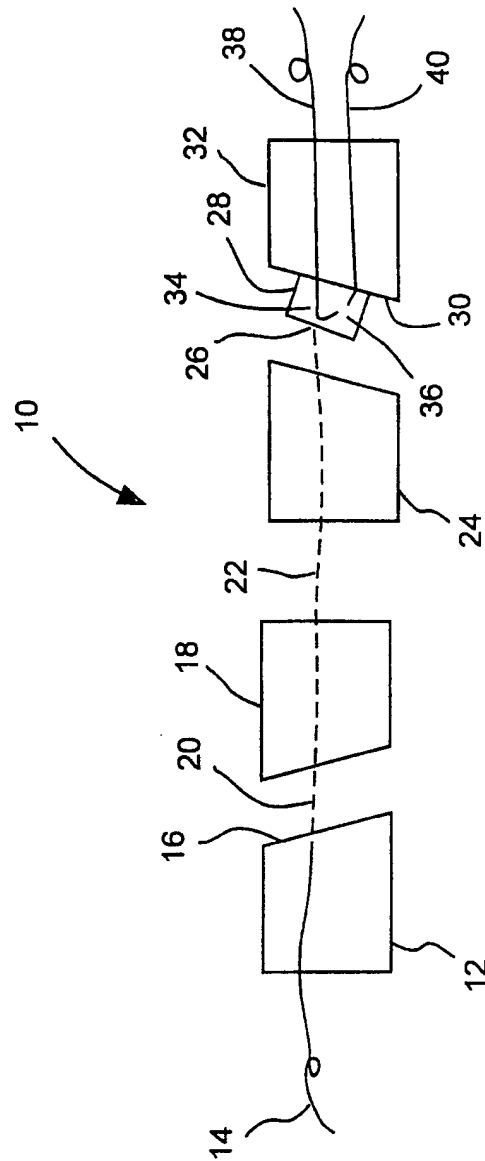


Fig. 3

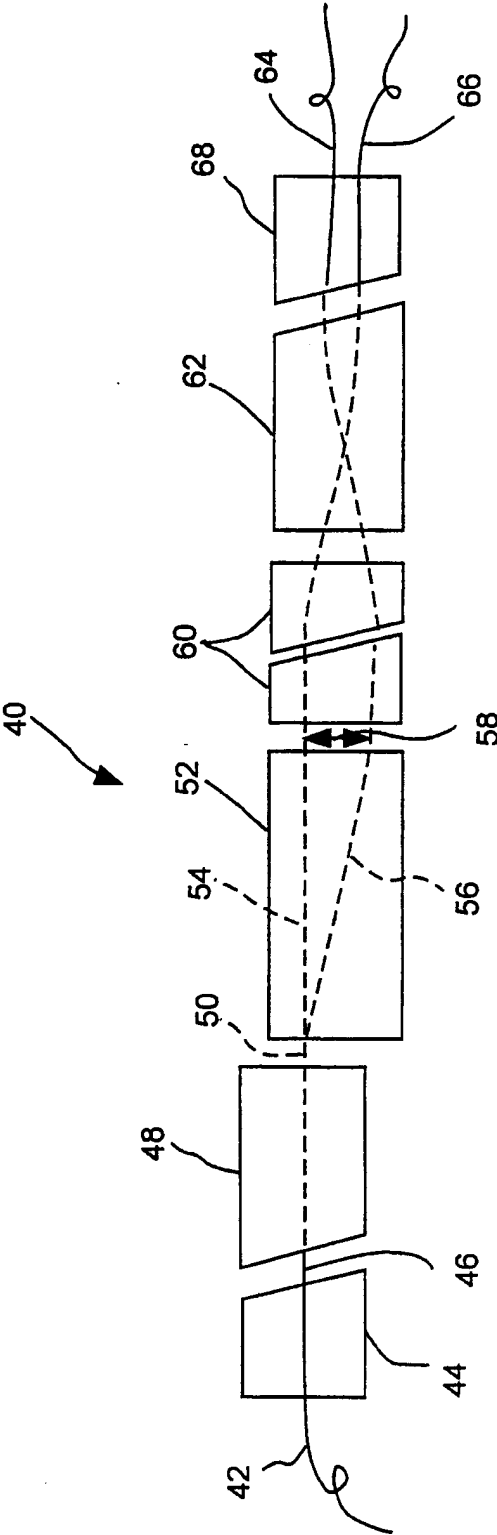


Fig. 4

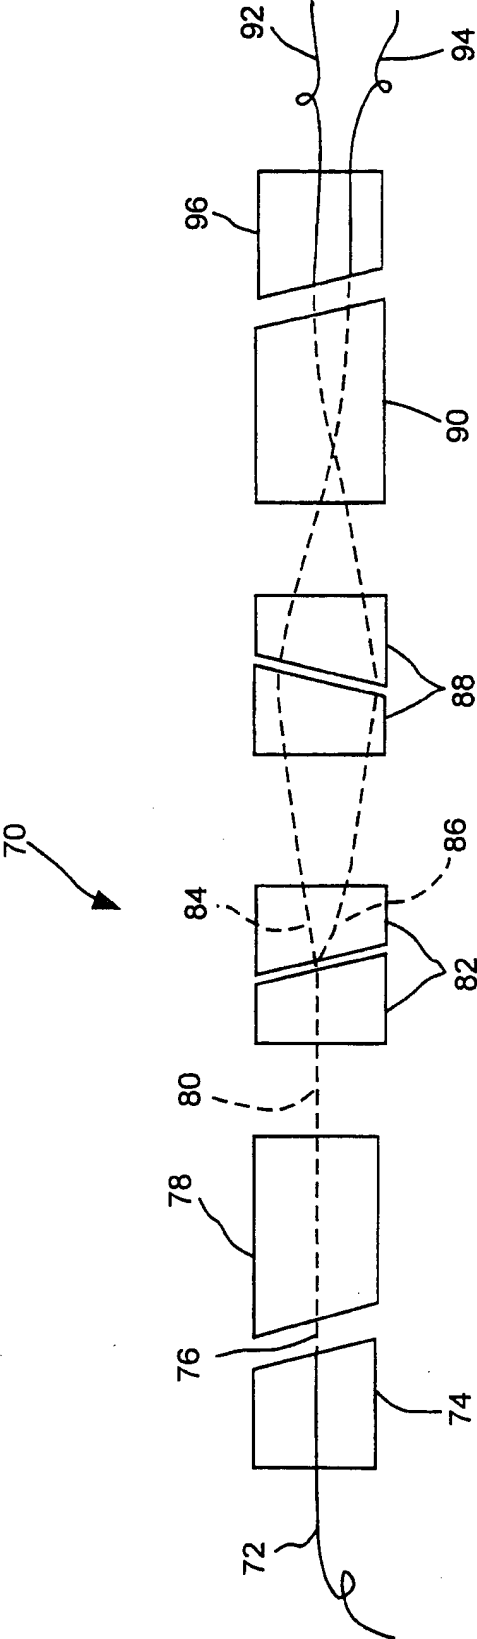


Fig. 5

6/6

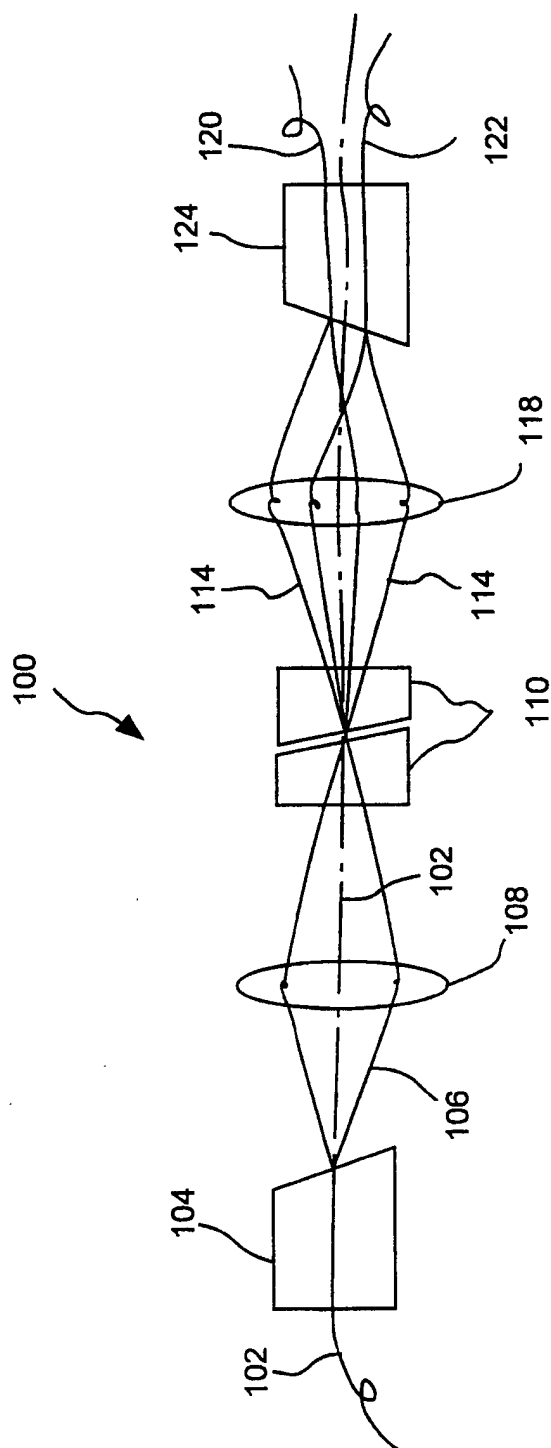


Fig..6

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 00/19903

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G02B6/27

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G02B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 671 613 A (BUHRER CARL F) 9 June 1987 (1987-06-09) abstract; figure 3A	1
A	---	2-21
X	EP 0 863 425 A (JDS FITEI INC) 9 September 1998 (1998-09-09) abstract; figures 1,2,7,8 page 1; figure 3	1
A	---	2-21
A	US 5 291 571 A (UNO SABURO ET AL) 1 March 1994 (1994-03-01) abstract; figures 11-14 column 7, line 5 -column 10, line 10 ---	1-21
	-/--	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

12 October 2000

Date of mailing of the international search report

19/10/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Jakoher, F

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 00/19903

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X,P	<p>EP 0 959 375 A (JDS FITELE INC) 24 November 1999 (1999-11-24) abstract; figures 2,3 -----</p>	1

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 00/19903

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4671613	A	09-06-1987	CA 1284909 A	18-06-1991
			DE 3686234 A	03-09-1992
			DE 3686234 T	07-01-1993
			EP 0222293 A	20-05-1987
			JP 62113103 A	25-05-1987
<hr/>				
EP 0863425	A	09-09-1998	US 6014254 A	11-01-2000
			CA 2222382 A	24-08-1998
			JP 10293228 A	04-11-1998
<hr/>				
US 5291571	A	01-03-1994	JP 5264872 A	15-10-1993
			JP 5281442 A	29-10-1993
<hr/>				
EP 0959375	A	24-11-1999	US 6055104 A	25-04-2000
			JP 2000028967 A	28-01-2000
<hr/>				